


Multi Eye Link Belt



Belt data

Pitch:	50,0 mm.
Belt width:	Up to 6.000,0 mm.
Strength:	Ideal for medium-heavy transportation.
Material:	Carbon Steel, AISI 304, AISI 316.
Applications:	Food & non-food industrial applications.
Options:	Side and/or centre chain. Side plates. Flights. Clips. Guide blocks.

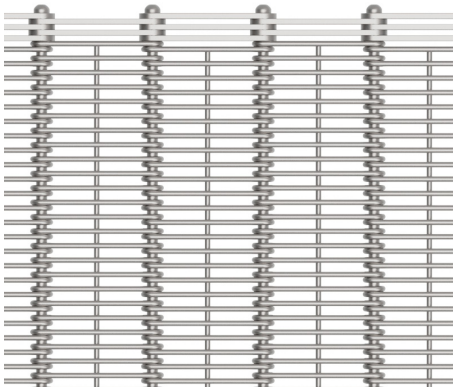

Top-view of the Multi Eye Link Belt.


Belt description

The Multi Eye Link Belt is a strong, straight running and positive driven conveyor belt that can be customized to meet a wide variety of industrial applications for both the food- and non-food industry. With an open wire distance ranging from 3,3 mm up to 25,0 mm*, the Multi Eye Link Belt can be configured to meet the air- and drainage flow requirements of your application!

With a variety of options and customization, the Multi Eye Link Belt can be configured to meet your industrial application! When extra strength is required the Multi Eye Link Belt can be equipped with side and/or centre chains and bar link reinforcements to meet the demands of the heaviest applications. For a full list of options please see Belt data or contact us.

For more information regarding setup, possibilities, customization and options feel free to contact us!

* Custom wire distances available upon request.

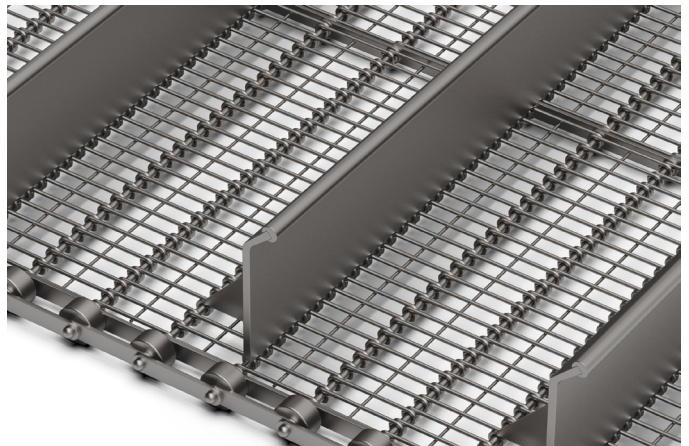

Multi Eye Link Belt with customized bent flights and side chain.

Interested in the Multi Eye Link Belt or need more information?

Feel free to contact us!