



DKT50-208

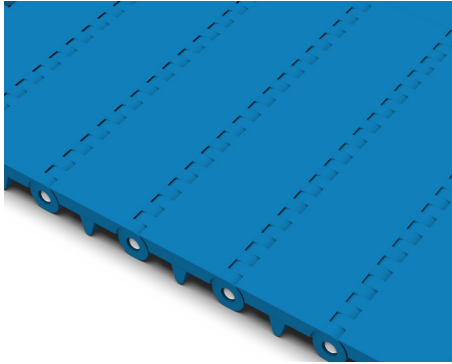

Belt data

Pitch:	50,0 mm.
Belt width:	Up to 3.000,0 mm.
Strength:	Ideal for medium-heavy transportation.
Material:	PP, PE, POM.
Applications:	Food & non-food industrial applications.
Colors:	White and Blue.
Options:	Flights: 25 mm, 50 mm, 75 mm, or 100 mm.

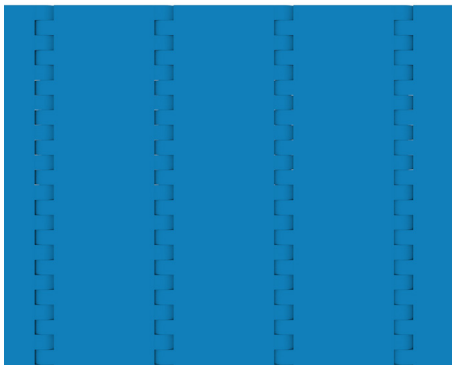

Top-view of the DKT50-208.

Belt description

The DKT50-208 is a strong, straight running and positive driven conveyor belt, especially designed and engineered for the food processing industry. The flat-top belt with closed surface is best suitable for the transportation of vegetables, meat, fish, and fruits (when drain is not required).

Although by default only flights are optional with a height of 25mm, 50mm, 75mm, or 100mm, the belt be configured in a hybrid solution for extra options, strenght, and durability. With the hybrid configuration, the belt can be adjusted to support side and/or centre chain(s), side plates, custom flights, and guide blocks.

For more information regarding setup, possibilities, customization and options feel free to contact us!

Interested in the DKT50-208 or need more information?

Feel free to contact us!