



# DKT50-222

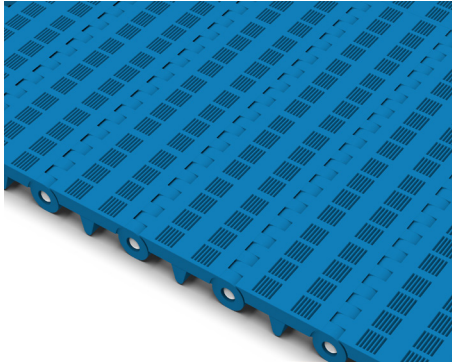

## Belt data

Pitch:	50,0 mm.
Belt width:	Up to 3.000,0 mm.
Strength:	Ideal for medium-heavy transportation.
Material:	PP, PE, POM.
Applications:	Food & non-food industrial applications.
Colors:	White and Blue.
Options:	Flights: 25 mm, 50 mm, 75 mm, or 100 mm.

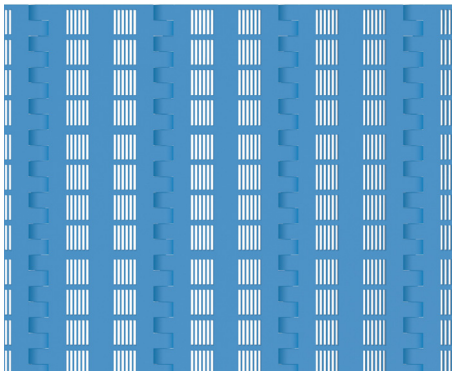

*Top-view of the DKT50-222.*

## Belt description

The DKT50-222 is a strong, straight running and positive driven conveyor belt, especially designed and engineered for the food processing industry. The perforated deck has an opening of 10 x 1 mm with an open surface of 22 %, thereby being best suitable for the transportation of, especially rice, and other smaller products where drain is required.

Although by default only flights are optional with a height of 25 mm, 50 mm, 75 mm, or 100 mm, the belt be configured in a hybrid solution for extra options, strenght, and durability. With the hybrid configuration, the belt can be adjusted to support side and/or centre chain(s), side plates, custom flights, and guide blocks.

For more information regarding setup, possibilities, customization and options feel free to contact us!

*Interested in the DKT50-222 or need more information?*

*Feel free to contact us!*

**[www.dk-transportbaand.com](http://www.dk-transportbaand.com)**