



# General Chains

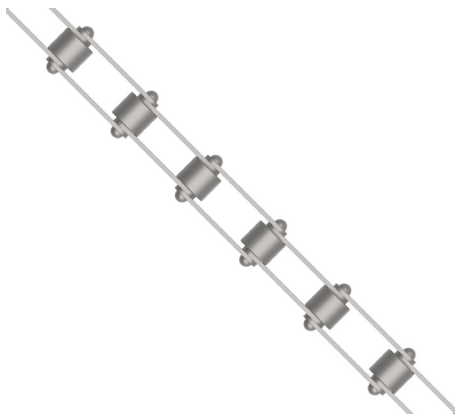

Top-view of a General Chain.

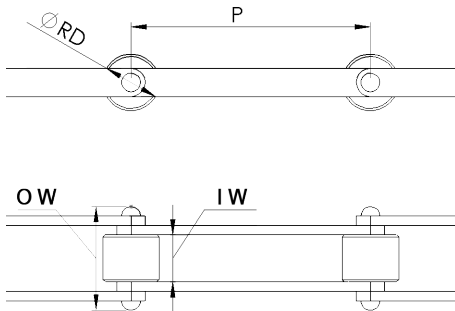

Front- and top-view of a General Chain.

## Chain data

**Pitch:** 38,10 mm, 41,91 mm, 50,00 mm, 75,00 mm, 76,20 mm.  
**Roller dia:** Depending on configuration, see chain dimensions.  
**Material:** Links: AISI 304, AISI 316.  
 Rollers: POM, Stainless Steel.

## Chain description

All DK Transportbaand conveyor belts with a belt pitch of 50,0 mm and 76,2 mm can be equipped with a side- and/or centre chain for a precise and strong positive drive. The chains are not limited to the conveyor belts and can be used as conveyor chains where special attachments can be mounted.

For more information regarding setup, possibilities, customization and options feel free to contact us!

## Chain dimensions

Pitch:	Roller dia:	Inner width:	Outside width:
38,10 mm.	Ø 19,0 or Ø 25,0 mm.	26,5 mm.	44,5 mm.
41,91 mm.	Ø 19,0 or Ø 25,0 mm.	26,5 mm.	44,5 mm.
50,00 mm.	Ø 12,0, Ø 20,0 or Ø 25,0 mm.	20,0 mm.	38,0 mm.
75,00 mm.	Ø 19,0 or Ø 25,0 mm.	26,5 mm.	44,5 mm.
76,20 mm.	Ø 12,0, Ø 20,0 or Ø 25,0 mm.	20,0 mm.	38,0 mm.

- P* = Pitch.
- RD* = Roller dia.
- IW* = Inner width.
- OW* = Outside width.

Interested in General Chains or need more information?  
 Feel free to contact us!